




Antennas

DATA SHEET

Hybrid Bi-Sector™ Array

12HBSAR-KU6NB

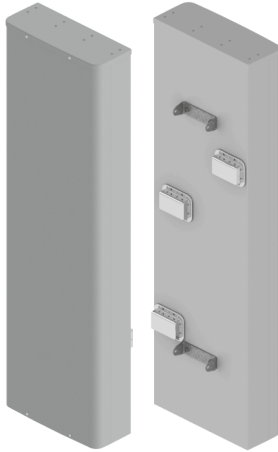

- Six foot (1.9 m), multiband, Twelve port Hybrid Bi-Sector™ Antenna. Deploying a high performing 65° azimuth beamwidth covering 698-960 MHz and a pair of CCI's Patented Asymmetrical 33° Shaped Beams covering 1695-2400 MHz frequencies
- Eight wide high band ports covering 1695-2400 MHz and four wide low band ports covering 698-960 MHz in a single antenna
- Full Spectrum Compliance for 698-960 MHz /1695-2400 MHz
- Provides a pair of LTE Optimized Asymmetric Shaped Beams for improved LTE data throughput by minimizing beam crossover, providing for an efficient use of valuable radio capacity and frequency spectrum
- LTE Optimized FBR, SPR and Boresight/Sector XPD Performance, essential for today's LTE Data Networks
- Exceeds minimum PIM performance requirements
- Equipped with new 4.3-10 connector, which is 40% smaller than traditional 7/16 DIN connector
- Equipped with Three Field Replaceable, Type 17 integrated AISG 2.0 compliant Remote Electrical Tilt (RET)

Overview

This version of the CCI Hybrid Bi-Sector™ Multiband Array is a Twelve port antenna, with eight wide high band ports covering 1695-2400 MHz and four wide low band ports covering 698-960 MHz. The CCI Hybrid Bi-Sector™ array uses a pair of CCI's Patented Asymmetric 33° Shaped Beams in the High Band frequencies and a high performance 65° azimuth beamwidth in the low band frequencies. The CCI Hybrid Bi-Sector Array thus provides the capability to deploy Dual (over split beams) 4x4 Multiple-input Multiple-output (MIMO) in the high band and Single 4x4 Multiple-input Multiple-output in the low band. The CCI Hybrid Bi-Sector™ Array utilizes three Type 17 RET controllers, with a separate RET control for the Low Band ports and a separate RET control in the High Band for each LEFT and RIGHT pair of CCI's Patented Asymmetric 33° Shaped Beams.

The CCI Hybrid Bi-Sector™ Multiband Array, allow operators to reduce antenna count and replace existing 65° networks, while increasing cell site capacity and LTE data throughput by minimizing overlap between CCI's Patented Asymmetric 33° Shaped Beams. This design approach lowers interference between sectors. All of this is achieved through a single panel array, producing significant CAPEX and OPEX cost savings for the operator.

CCI antennas are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

Applications

- Dual (over split beams) 4x4 MIMO on High Band and single 4x4 MIMO on Low Band
- Ready for Network Standardization on 4.3-10 connectors
- Ideal Antenna Solution for structurally constrained sites, where data throughput, capacity and limited spectrum is a concern
- With CCI's Hybrid Bi-Sector™ Antenna, wireless operators can connect multiple platforms to a single antenna, reducing tower load, lease expense, deployment time and installation cost



Antennas

SPECIFICATIONS

Hybrid Bi-Sector™ Array

12HBSAR-KU6NB

Electrical

Ports	4 x Low Band Ports for 698-960 MHz			
Frequency Range	698-806 MHz	790-862 MHz	824-896 MHz	880-960 MHz
Gain ¹	14.6 dBi	15.0 dBi	15.1 dBi	15.1 dBi
Gain (Average) ²	13.8 dBi	14.3 dBi	14.4 dBi	14.4 dBi
Azimuth Beamwidth (-3dB)	69°	65°	63°	61°
Elevation Beamwidth (-3dB)	12.8°	11.5°	11.0°	10.3°
Electrical Downtilt	0° to 10°	0° to 10°	0° to 10°	0° to 10°
Elevation Sidelobes (1st Upper)	< -19 dB	< -19 dB	< -19 dB	< -19 dB
Front-to-Back Ratio @180°	> 33 dB	> 35 dB	> 35 dB	> 35 dB
Cross-Polar Discrimination (at Peak)	> 25 dB	> 25 dB	> 25 dB	> 25 dB
Cross-Polar Port-to-Port Isolation	> 25 dB	> 25 dB	> 25 dB	> 25 dB
Voltage Standing Wave Ratio(VSWR)	< 1.5:1	< 1.5:1	< 1.5:1	< 1.5:1
Passive Intermodulation (2x20W)	≤ -153 dBc	≤ -153 dBc	≤ -153 dBc	≤ -153 dBc
Input Power Continuous Wave (CW)	500 watts	500 watts	500 watts	500 watts
Polarization	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°
Input Impedance	50 ohms	50 ohms	50 ohms	50 ohms
Lightning Protection	DC Ground	DC Ground	DC Ground	DC Ground

¹Peak gain across sub-bands.

²Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V9.6.

Ports	8 x High Band Ports for 1695-2400 MHz			
Frequency Range	1695-1880 MHz	1850-1990 MHz	1920-2180 MHz	2300-2400 MHz
Gain ¹	17.1 dBi	17.6 dBi	18.1 dBi	18.8 dBi
Gain (Average) ²	16.1 dBi	16.8 dBi	17.1 dBi	17.8 dBi
Azimuth Beamwidth (-3dB)	37°	34°	32°	28°
Elevation Beamwidth (-3dB)	10.1°	9.2°	8.7°	7.8°
Electrical Downtilt	0° to 10°	0° to 10°	0° to 10°	0° to 10°
Elevation Sidelobes (1st Upper)	< -17 dB	< -18 dB	< -17 dB	< -18 dB
Front-to-Back Ratio @180°	> 35 dB	> 35 dB	> 35 dB	> 35 dB
Cross-Polar Discrimination (at Peak)	> 22 dB	> 21 dB	> 20 dB	> 23 dB
Cross-Polar Port-to-Port Isolation	> 25 dB	> 25 dB	> 25 dB	> 25 dB
Voltage Standing Wave Ratio(VSWR)	< 1.5:1	< 1.5:1	< 1.5:1	< 1.5:1
Passive Intermodulation (2x20W)	≤ -153 dBc	≤ -153 dBc	≤ -153 dBc	≤ -153 dBc
Input Power Continuous Wave (CW)	300 watts	300 watts	300 watts	300 watts
Polarization	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°
Input Impedance	50 ohms	50 ohms	50 ohms	50 ohms
Lightning Protection	DC Ground	DC Ground	DC Ground	DC Ground

¹Peak gain across sub-bands.

²Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V9.6.



Antennas

SPECIFICATIONS

Hybrid Bi-Sector™ Array

12HBSAR-KU6NB


Mechanical

Dimensions (LxWxD)	75.9x22.4x8.7 in (1929x570x220 mm)
Survival Wind Speed	> 150 mph (> 241 kph)
Front Wind Load	375 lbs (1670 N) @ 100 mph (161 kph)
Side Wind Load	171 lbs (759 N) @ 100 mph (161 kph)
Equivalent Flat Plate Area	14.7 ft ² (1.4 m ²)
Weight*	68.8 lbs (31.2 kg)
Connector	12 x 4.3-10 female
Mounting Pole	2 to 5 in (5 to 12 cm)

* Weight excludes mounting and RET

Bottom View

12HBSAR-KU6NBA

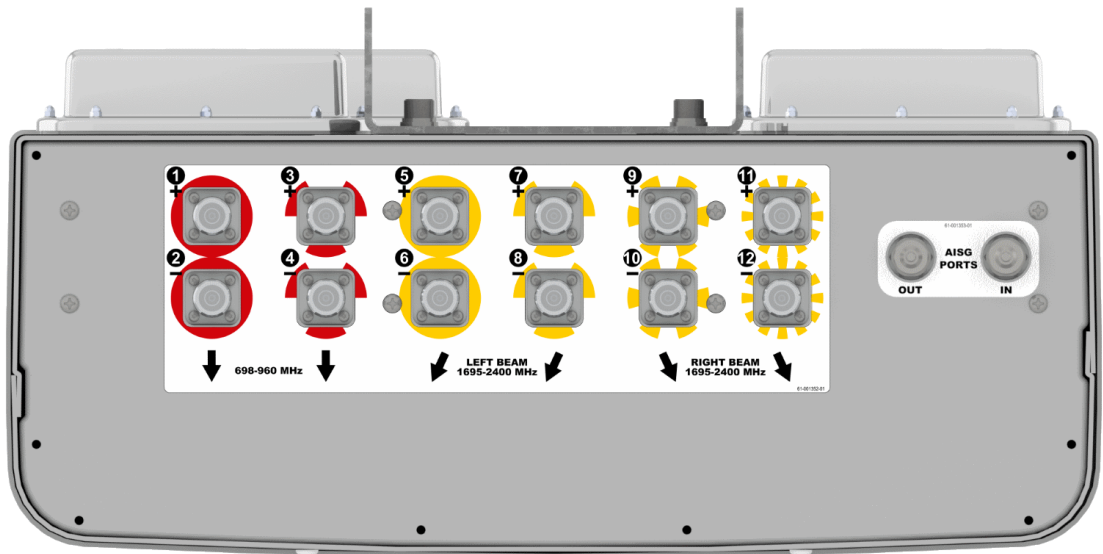



Antennas


Hybrid Bi-Sector™ Array

12HBSAR-KU6NB

SPECIFICATIONS


Mechanical

Connector Spacing

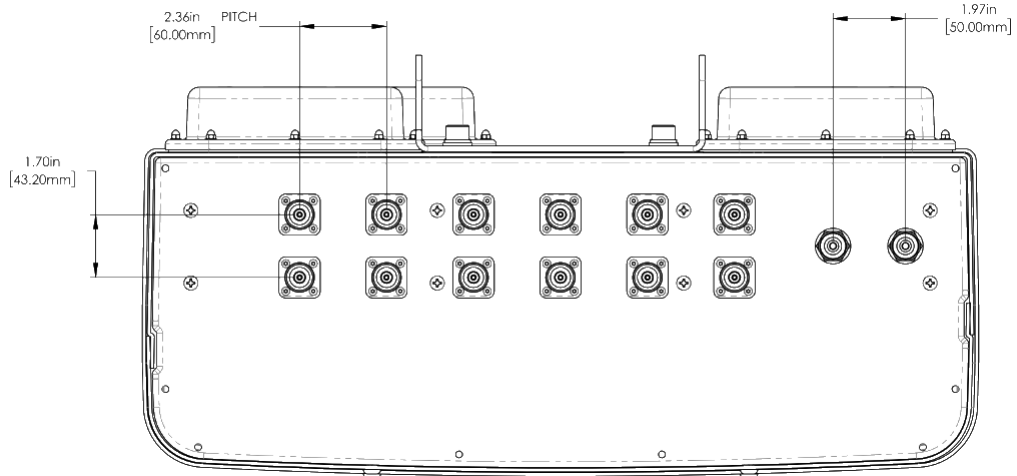

RET to Array Configuration

Top of antenna Viewed from rear

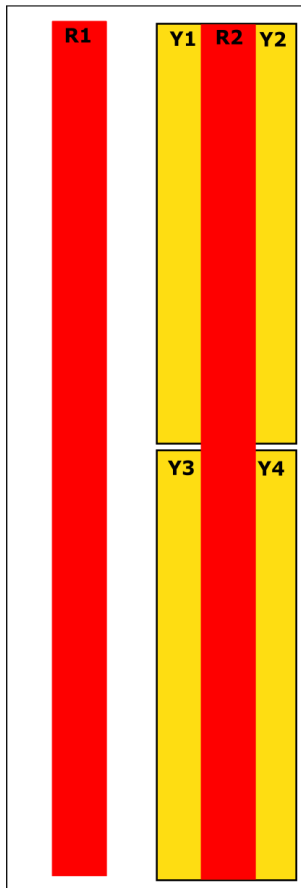

RET placement as viewed from rear of antenna

Top of antenna

MM.1

MM.2

MM.3

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID	
R1	1, 2	698-960	1, 2, 3, 4	C1xxxxxxxMM.1	
R2	3, 4	698-960			
Y1	5, 6	1695-2400	5, 6, 7, 8 Left Beams	C1xxxxxxxMM.3	
Y3	7, 8	1695-2400			
Y2	9, 10	1695-2400			9, 10, 11, 12 Right Beams
Y4	11, 12	1695-2400			



Antennas


SPECIFICATIONS

Hybrid Bi-Sector™ Array


12HBSAR-KU6NB

Typical Antenna Patterns


For detailed information on additional antenna patterns, contact customer support at support@cciproducts.com

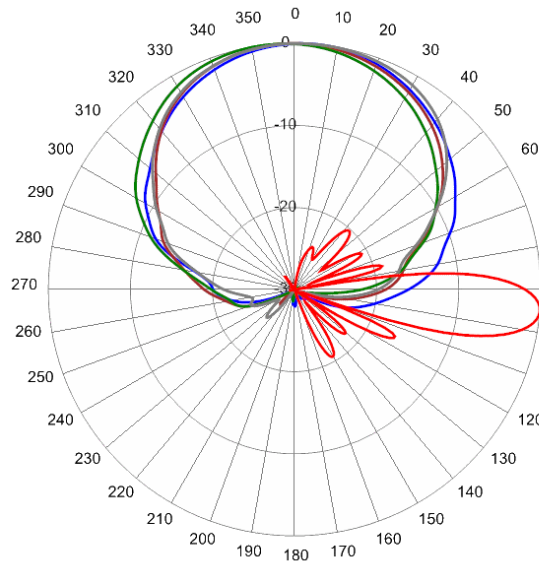

758 MHz Azimuth with Elevation 5°

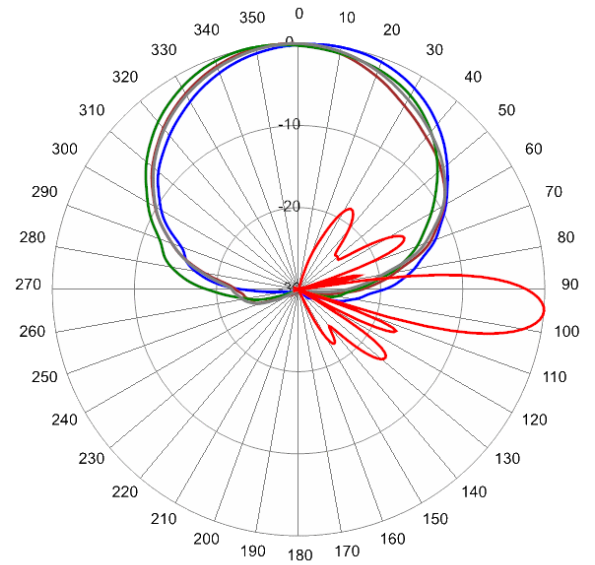

832 MHz Azimuth with Elevation 5°

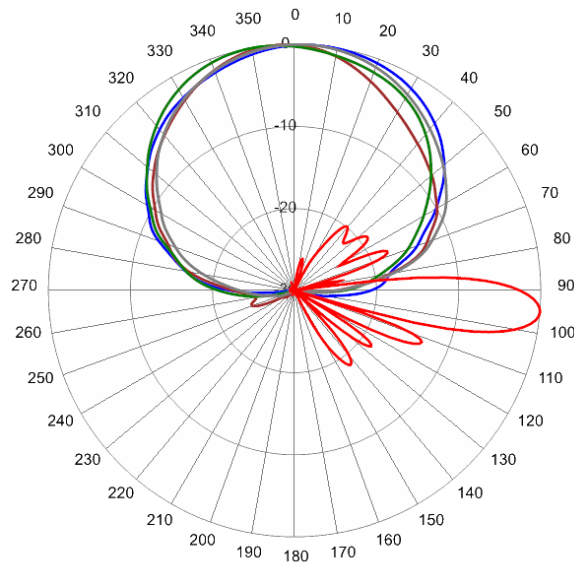

880 MHz Azimuth with Elevation 5°




Antennas

SPECIFICATIONS


Hybrid Bi-Sector™ Array

12HBSAR-KU6NB


Typical Antenna Patterns

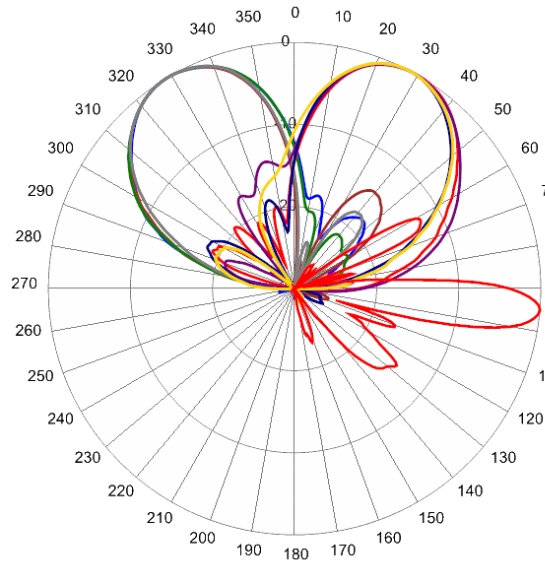

1990 MHz Azimuth with Elevation 5°

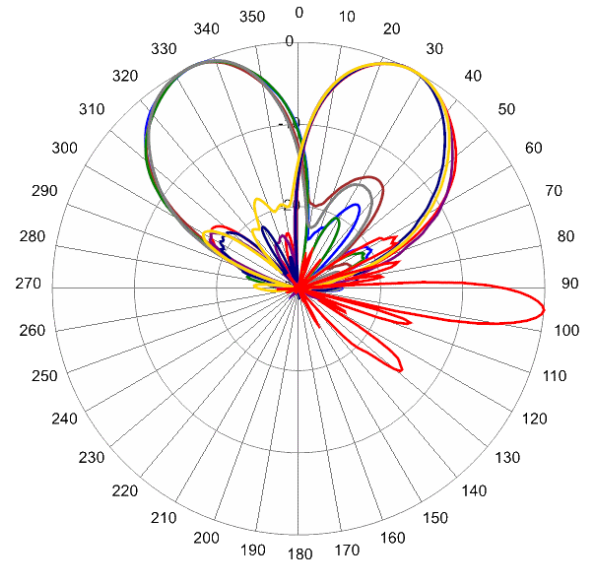

2170 MHz Azimuth with Elevation 5°

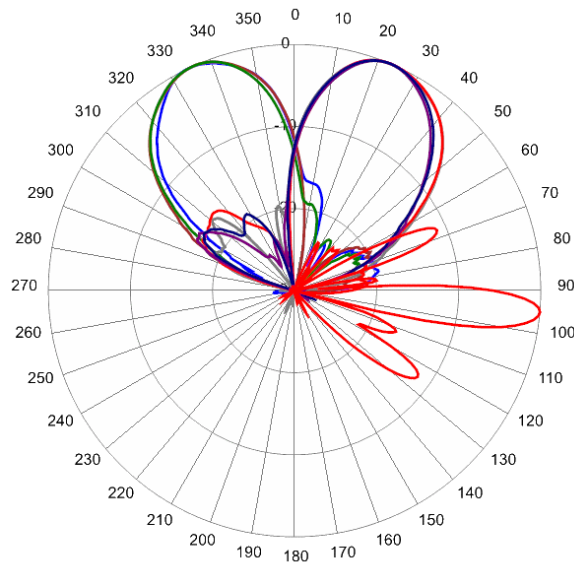

2360 MHz Azimuth with Elevation 5°



Antennas

ORDERING

Hybrid Bi-Sector™ Array

12HBSAR-KU6NB

Parts & Accessories

12HBSAR-KU6NBA-K	Six foot (1.9 m) Hybrid Bi-Sector™ Antenna Array with 4.3-10 female connectors, 3 factory installed external BSA-RET400 RET actuators (Type 17 Internal) and MBK-01 mounting brackets
MBK-01	MBK-01 Mounting Kit with 0° - 10° mechanical tilt
MBK-16	MBK-16 Mounting Kit with fixed 0° mechanical tilt
BSA-RET400	Type 17 remote electrical tilt actuator
AISGC-M-F-10FT	10 Foot (3 M) Male/Female AISG cable



Antennas


ACCESSORIES

Mounting Bracket Kit


MBK-01

Mechanical


Weight	12.6 lbs (5.7 kg)
Hinge Pitch	47.25 in (1200 mm)
Mounting Pole Dimension	2 to 5 in (5 to 12 cm)
Fastener Size	M12
Installation Torque	40 ft·lb (54 Nm)
Mechanical Tilt Adjustment	0° - 10°

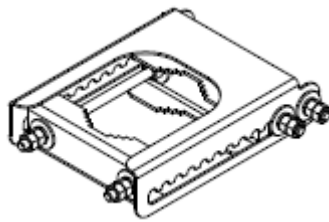

MBK-01 Top Adjustable Bracket

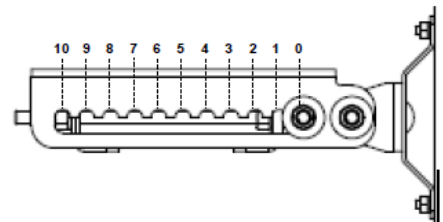

MBK-01 Top Adjustable Bracket Side View



MBK-01 Bottom Fixed Bracket



Antennas



ACCESSORIES

Mounting Bracket Kit

MBK-16

Mechanical

Weight	9.9 lbs (4.5 kg)
Hinge Pitch	47.25 in (1200 mm)
Mounting Pole Dimension	2 to 5 in (5 to 12 cm)
Fastener Size	M12
Installation Torque	40 ft-lbs (54 Nm)
Mechanical Tilt	0°

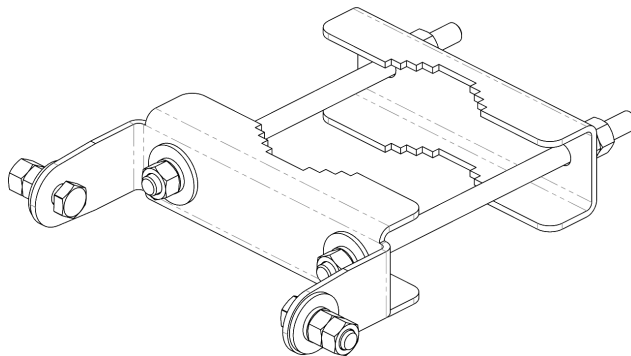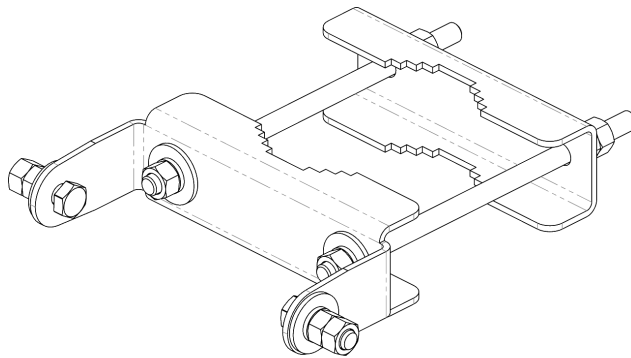

MBK-16 Top and Bottom Bracket



Antennas

ACCESSORIES

Internal Remote Electrical Tilt (iRET)

BSA-RET400

General Specifications

Part Number	BSA-RET400
Protocols	AISG 2.0
RET Type	Type 17
Adjustment Cycles	>10,000 cycles
Tilt Accuracy	±0.1°
Temperature Range	-40° C to 70° C


Electrical

Data Interface Signal	DC
Input Voltage	10-30 Vdc
Current Consumption Tilt	100 mA at $V_{in}=24$ (500 mA MAX)
Current Consumption Idle	10 mA at $V_{in}=24$

Mechanical

Dimensions (LxWxD)	7.0x5.3x1.8 in. (179x134x45 mm)
Housing	ASA/ABS/Aluminum
Weight	1.3 lbs (0.6 kg)

ASA= Acrylic Styrene Acrylonitrile
ABS=Acrylonitrile Butadiene Styrene

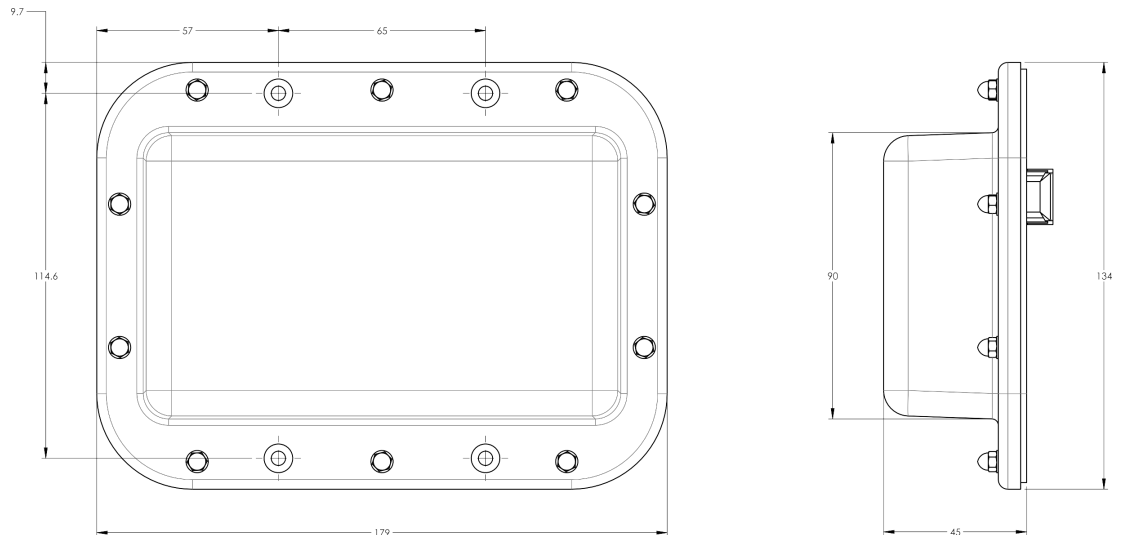



Antennas

STANDARDS & CERTIFICATIONS

Hybrid Bi-Sector™ Array

12HBSAR-KU6NB

Standards & Compliance

Safety	EN 60950-1, UL 60950-1
Emission	EN 55022
Immunity	EN 55024
Environmental	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, GR-63-CORE 4.3.1, EN 60529, IP 24

Certifications

Antenna Interface Standards Group (AISG), Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001

